

SFP-GEA11-T 10/100/1000 BASE-T Copper SFP Transceiver

PRODUCT FEATURES

- Up to 1.25 Gb/s bi-directional data links
- Hot-pluggable SFP footprint
- Low power dissipation(1.05W typical)
- Compact RJ-45 connector assembly
- Fully metal enclosure, for lower EMI
- RoHS compliant and lead-free
- Single +3.3V power supply
- 10/100/1000 BASE-T operation in host systems with SGMII interface
- 1.25 Gigabit Ethernet over Cat 5 cable
- Case operating temperature:

Commercial: $0 \, \text{C}$ to $+70 \, \text{C}$

Extended: $-10 \, \text{°C}$ to $+80 \, \text{°C}$

Industrial: $-40 \, \text{C}$ to $+85 \, \text{C}$

PRODUCT DESCRIPTION

FiberJP'S SFP-GEA11-T 10/100/1000 BASE-T Copper Small Form Pluggable (SFP) transceivers are based on the SFP Multi Source Agreement (MSA). They are compatible with the Gigabit Ethernet standards as specified in IEEE Std 802.3. The 10/100/1000 BASE-T physical layer IC (PHY) can be accessed via I2C, allowing access to all PHY settings and features.

The SFP-GEA11-T is compatible with 1000BASE-X auto-negotiation, and have a link indication feature. PHY is disabled when TX_disable is high or open.

| Product part Number | Link Indicator on RX_LOS Pin | 1000BASE-X auto-negotiation enabled by default |
|---------------------|------------------------------|--|
| FYSF-T212-02-M1B-4 | Yes | Yes |

I. SFP to Host Connector Pin Out



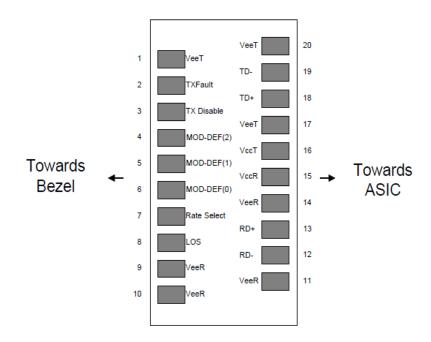


Figure 1. Diagram of host board connector block pin numbers and names

| Pin | Symbol | Name/Description | NOTE |
|-----|-------------|--|------|
| 1 | VEET | Transmitter Ground (Common with Receiver Ground) | 1 |
| 2 | TFAULT | Transmitter Fault. Not supported. | |
| 3 | TDIS | Transmitter Disable. PHY disabled on high or open | 2 |
| 4 | MOD_DEF(2) | Module Definition 2. Data line for Serial ID. | 3 |
| 5 | MOD_DEF(1) | Module Definition 1. Clock line for Serial ID. | 3 |
| 6 | MOD_DEF(0) | Module Definition 0. Grounded within the module. | 3 |
| 7 | Rate Select | No connection required | |
| 8 | LOS | Loss of Signal indication. Logic 0 indicates normal operation. | 4 |
| 9 | VEER | Receiver Ground (Common with Transmitter Ground) | 1 |
| 10 | VEER | Receiver Ground (Common with Transmitter Ground) | 1 |
| 11 | VEER | Receiver Ground (Common with Transmitter Ground) | 1 |
| 12 | RD- | Receiver Inverted DATA out. AC Coupled | |
| 13 | RD+ | Receiver Non-inverted DATA out. AC Coupled | |
| 14 | VEER | Receiver Ground (Common with Transmitter Ground) | 1 |
| 15 | VCCR | Receiver Power Supply | |
| 16 | VCCT | Transmitter Power Supply | |
| 17 | VEET | Transmitter Ground (Common with Receiver Ground) | 1 |
| 18 | TD+ | Transmitter Non-Inverted DATA in. AC Coupled. | |
| 19 | TD- | Transmitter Inverted DATA in. AC Coupled. | |
| 20 | VEET | Transmitter Ground (Common with Receiver Ground) | 1 |

Notes:

1. Circuit ground is connected to chassis ground



- 2. PHY disabled on $T_{DIS} > 2.0V$ or open, enabled on $T_{DIS} < 0.8V$
- 3. Should be pulled up with 4.7k 10k Ohms on host board to a voltage between 2.0 V and 3.6 V. MOD_DEF(0) pulls line low to indicate module is plugged in.
- 4. LVTTL compatible with a maximum voltage of 2.5V. Not supported on SFP-GEA11-T

II. 3.3V Volt Electrical Power Interface

The SFP-GEA11-T has an input voltage range of 3.3 V +/- 5%. The 4V maximum voltage is not allowed for continuous operation.

| +3.3 Volt Electrical Power Interface | | | | | | |
|--------------------------------------|--------|------|-----|------|------|---|
| Parameter | Symbol | Min | Тур | Max | unit | Notes/Conditions |
| Supply Current | Is | | 320 | 375 | mA | 1.2W max power over full range of voltage and temperature. See caution note below |
| Input Voltage | Vcc | 3.13 | 3.3 | 3.47 | V | Referenced to GND |
| Maximum Voltage | Vmax | | | 4 | V | |
| Surge Current | Isurge | | | 30 | mA | Hot plug above steady state current. See caution note below |

Caution: Power consumption and surge current are higher than the specified values in the SFP MSA

III. Low-Speed Signals

MOD_DEF(1) (SCL) and MOD_DEF(2) (SDA), are open drain CMOS signals (see section VII, "Serial Communication Protocol"). Both MOD_DEF(1) and MOD_DEF(2) must be pulled up to host_Vcc

| Low-Speed Signals, E | Low-Speed Signals, Electronic Characteristics | | | | | | | | | | |
|----------------------|---|------------------|----------------|------|---|--|--|--|--|--|--|
| Parameter | Symbol | Min | Max | unit | Notes/Conditions | | | | | | |
| SFP Output LOW | Vol | 0 | 0.5 | V | 4.7k to 10k pull-up to host_Vcc, measured at host side of connector | | | | | | |
| SFP Output HIGH | Voh | host_Vcc -0.5 | host_Vcc + 0.3 | V | 4.7k to 10k pull-up to host_Vcc, measured at host side of connector | | | | | | |
| SFP Input LOW | VIL | 0 | 0.8 | V | 4.7k to 10k pull-up to Vcc, measured at SFP side of connector | | | | | | |
| SFP Input HIGH | Vih | 2 | Vcc + 0.3 | V | 4.7k to 10k pull-up to Vcc, measured at SFP side of connector | | | | | | |

IV. High-Speed Electrical Interface

All high-speed signals are AC-coupled internally.



| High-Speed Electrical Interface, Transmission Line-SFP | | | | | | |
|--|---------|-----|-----|-----|------|---|
| Parameter | Symbol | Min | Тур | Max | unit | Notes/Conditions |
| Line Frequency | fL | | 125 | | MHz | 5-level encoding, per IEEE 802.3 |
| Tx Output Impedance | Zout,TX | | 100 | | Ohm | Differential, for all frequencies between 1MHz and 125MHz |
| Rx Input Impedance | Zin,RX | | 100 | | Ohm | Differential, for all frequencies between 1MHz and 125MHz |

| High-Speed Electrical Interface, Host-SFP | | | | | | |
|---|------------|-----|-----|------|------|------------------|
| Parameter | Symbol | Min | Тур | Max | unit | Notes/Conditions |
| Single ended data input swing | Vinsing | 250 | | 1200 | mV | Single ended |
| Single ended data output swing | Voutsing | 350 | | 800 | mV | Single ended |
| Rise/Fall Time | T_r, T_f | | 175 | | psec | 20%-80% |
| Tx Input Impedance | Zin | | 50 | | Ohm | Single ended |
| Rx Output Impedance | Zout | | 50 | | Ohm | Single ended |

V. General Specifications

| General | | | | | | | | |
|--------------|--------|-----|-----|------|--------|---|--|--|
| Parameter | Symbol | Min | Тур | Max | unit | Notes/Conditions | | |
| Data Rate | BR | 10 | | 1000 | Mb/sec | IEEE 802.3 compatible. See Notes 2 through 4 below | | |
| Cable Length | L | | | 100 | m | Category 5 UTP. BER <10 ⁻¹² | | |

Notes:

- 1. Clock tolerance is +/- 50 ppm
- 2. By default, the SFP-GEA11-T is a full duplex device in preferred master mode
- 3. Automatic crossover detection is enabled. External crossover cable is not required
- 4. 10/100/1000 BASE-T operation requires the host system to have an SGMII interface with no clocks.

VI. Environmental Specifications




| Environmental Specifications | | | | | | | |
|------------------------------|--------|-----|-----|-----|--------------|---------------------|--|
| Parameter | Symbol | Min | Тур | Max | unit | Notes/Conditions | |
| Case Operating Temperature | Tcase | 0 | | 70 | С | SFP-GEA11-T | |
| | | -10 | | 80 | С | SFP-GEA11-T | |
| | | -40 | | 85 | С | SFP-GEA11-T | |
| Storage Temperature | Tsto | -40 | | 85 | $\mathcal C$ | Ambient temperature | |

VII. Serial Communication Protocol

SFP-GEA11-T support the 2-wire serial communication protocol outlined in the SFP MSA. It uses an Atmel AT24C02B 256 byte EEPROM with an address of A0h.

| Serial Bus Timing Requirements | | | | | | |
|--------------------------------|--------|-----|-----|---------|------|------------------|
| Parameter | Symbol | Min | Тур | Max | unit | Notes/Conditions |
| I ² C Clock Rate | | 0 | | 100,000 | Hz | |

VIII. Mechanical Specifications (Unit:mm)

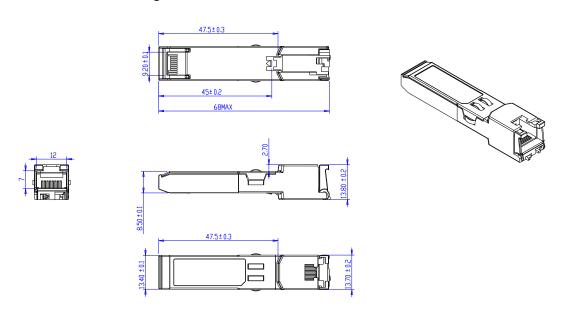

Appendix A. Document Revision

| Version No. | Date | Description |
|-------------|-----------|-----------------------|
| 1.0 | 2019-6-01 | Preliminary datasheet |